



VHF MARINE TRANSCEIVER

IC-M2A



Meets
MIL-STD 810

Big Screen, Tough Body and It's Waterproof too!

Extra Large LCD Display

A large LCD* offers easy to read large channel indication. The S-meter shows the signal strength of the received signal. In addition, bright LCD backlighting is great for night time operation.

* 35x24 mm, 1 1/8 x 1 5/16 in. dimensions



The photo shows actual display size.

Waterproof Construction

The IC-M2A is built waterproof to endure 1 meter depth for 30 minutes. (Equivalent to JIS waterproof specification grade 7.) Non-corrosive construction ensures reliable long life communication out on the water.

Simple Operation

Well spaced, clearly labeled switches on the front panel provides easy one-hand access to frequently used functions. To access secondary functions, just hold the each button for one second. The function name is indicated beside each button in white lettering for easy recognition. The IC-M2A does not require complicated operation to use it efficiently and its maximum potential.

Powerful 5W Output Power

The supplied BP-224 Ni-Cd battery pack generates a powerful 5W of output power and provides 8 hours of typical operating time*. For saving battery consumption, the output power can be reduced to 3W or 1W. The BP-223 alkaline cell case is also available during charging.

* Tx:Rx:Stand-by duty ratio = 5:5:90

Desktop Charger Supplied

The BC-150 desktop charger is a simple drop-in charger. It has screw holes for easy installation, and also a cradle to hold an unattached battery – You can leave it alone to charge even in choppy seas.

Other Features

- Auto Weather scan and Weather alert function
- 4-step battery life indicator
- Dual/tri-watch function
- Normal, priority and tag scanning
- Instant access to Ch 16, Ch 9 or programmable call channel
- 2-step power saver
- Key lock function

Icom Inc.

SPECIFICATIONS

GENERAL

- Frequency range (MHz) :
 - Tx 156.025–157.425
 - Rx 156.050–163.275
- Usable channels :
 - All U.S.A., International and Canadian channels
 - ; plus 10 weather channels (U.S.A. only)
- Type of emission : 16K0G3E (FM)
- Current drain (at 7.2V DC) :
 - Tx (at 5W output) 1.5A typical
 - Rx (at AF max.) 200mA typical
 - (at Stand-by) 20mA typical
- Operating temp. range : -20°C to +60°C;
 - 4°F to +140°F
- Antenna connector : STUD (50Ω)
- Dimensions : 61(W)×135(H)×41(D) mm;
 - (proj. not included) 2¹/₂(W)×5¹/₁₆(H)×1⁵/₈(D) in
- Weight (approx.; with BP-224): 360g; 12.7oz

TRANSMITTER

- Output power : 5W (Hi), 3W (Mid), and 1W (Low)
- Modulation system : Variable reactance frequency modulation
- Max. frequency deviation : ± 5kHz
- Audio harmonic distortion : Less than 10% (at 60% mod.)
- Spurious emissions : Less than -65dBc

RECEIVER

- Modulation system : Double-conversion superheterodyne
- Sensitivity (at 12dB SINAD) : 0.25μV typical
- Squelch sensitivity : Less than 0.35μV (at threshold)
- Adjacent Ch. selectivity : 70dB typical
- Spurious response : 70dB typical
- Intermodulation rejection : 70dB typical

- Hum and noise ratio : More than 40dB
- Audio output power : 0.35W (typical at 10% distortion with an 8Ω load)

Supplied accessories:

- Battery pack
- Battery case*
- Battery charger
- AC adapter*
- Belt clip
- Antenna
- Hand strap (* Not supplied with some versions.)

Applicable U.S. Military Specifications

Standard	MIL 810 C		MIL 810 D		MIL 810 E		MIL 810 F	
	Method	Proc.	Method	Proc.	Method	Proc.	Method	Proc.
Low Pressure	500.1	I	500.2	I, II	500.3	I, II	500.4	I, II
High Temp.	501.1	I	501.2	I, II	501.3	I, II	501.4	I, II
Low Temp.	502.1	I	502.2	I, II	502.3	I, II	502.4-3	I, II
Temp. Shock	503.1	I	503.2	I	503.3	I	503.4	I
Solar Radiation	505.1	I	505.2	I	505.3	I	505.4	I
Rain	506.1	I, II	506.2	I, II	506.3	I, II	506.4	I, II
Humidity	507.1	I, II	507.2	II, III	507.3	II, III	507.4	-
Salt Fog	509.1	I	509.2	I	509.3	I	509.4	-
Vibration	514.2	VIII, X	514.3	I	514.4	I	514.5	I
Shock	516.2	I, II, V	516.3	I, IV	516.4	I, IV	516.5	I, IV


Specifications for the IC-M2A are measured in accordance with EIA-603. All stated specifications are subject to change without notice or obligation.

OPTIONS

BATTERY PACK AND CASE



BP-223 BATTERY CASE
Battery case for LR6 (AA)×6 alkaline cells.
BP-224 BATTERY PACK
7.2V/750mAh Ni-Cd battery pack. Provides 8 hours operating time (approx.).
(Tx (Hi); Rx: standby=5:5:90)




BC-150 DESKTOP CHARGER + BC-147A/E AC ADAPTER
Regularly charges the battery pack, BP-224 in 8 hours (approx.). The same as that supplied.




BC-119N DESKTOP CHARGER + AD-103 CHARGER ADAPTER + BC-145A/E/V AC ADAPTER
For rapid charging of battery pack. An AC adapter may be supplied depending on version. Charging time: 1–2 hours.
BC-121N MULTI-CHARGER + AD-103 DESKTOP CHARGER ADAPTER + BC-124 AC ADAPTER
For rapid charging of up to 6 battery packs (Six AD-103s are required), BP-224. An AC adapter, BC-124, may be supplied, depending on version. Charging time: 1–2 hours.

BELT CLIPS



MB-68: Universal belt clip for attaching to your belt.
MB-74: Alligator type. Clips to almost anything in a variety of convenient places.

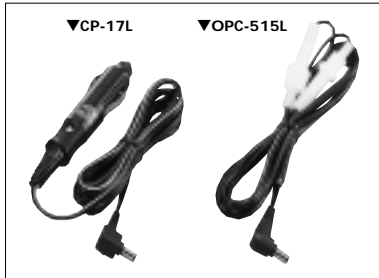

CP-17L CIGARETTE LIGHTER CABLE WITH NOISE FILTER
OPC-515L DC POWER CABLE
For use with the battery charger, BC-150 or BC-119N, instead of the AC adapter. (12–16 V DC required)



OPC-656 DC POWER CABLE
For use the BC-121N with a DC power supply. (12–20V DC required)

Icom Inc.

1-1-32, Kamiminami, Hirano-ku, Osaka 547-0003, Japan Phone: 06 6793 5302 Fax: 06 6793 0013 URL: <http://www.icom.co.jp/world/index.html>

Count on us!

Icom America Inc.

<Corporate Headquarters>
2380 116th Avenue N.E., Bellevue, WA 98004, U.S.A.
Phone: (425) 454-8155 Fax: (425) 454-1509
URL : <http://www.icomamerica.com>
<Customer Service> Phone : (425) 454-7619

Icom Canada

Glenwood Centre #150-6165 Highway 17,
Delta, B.C., V4K 5B8, Canada
Phone: (604) 952-4266 Fax: (604) 952-0090
URL : <http://www.icomcanada.com>

Icom (Australia) Pty. Ltd.

A.B.N. 88 006 092 575
290-294 Albert Street, Brunswick, Victoria, 3056, Australia
Phone: 03 9387 0666 Fax: 03 9387 0022
URL : <http://www.icom.net.au>

Icom New Zealand

146A Harris Road, East Tamaki, Auckland, New Zealand
Phone: 09 274 4062 Fax: 09 274 4708
URL : <http://www.icom.co.nz>

Icom (Europe) GmbH

Communication Equipment
Himmelgeister Str. 100, D-40225 Düsseldorf, Germany
Phone: 0211 346047 Fax: 0211 333639
URL : <http://www.icomeurope.com>

Icom Spain S.L.

Ctra. de Gracia a Manresa Km. 14,750
08190 Sant Cugat del Valles Barcelona, SPAIN
Phone: (93) 590 26 70 Fax: (93) 589 04 46
URL : <http://www.icomspain.com>

Icom (UK) Ltd.

Unit 9, Sea St., Herne Bay, Kent, CT6 8LD, U.K.
Phone: 01227 741741 Fax: 01227 741742
URL : <http://www.icomuk.co.uk>

Icom France S.a

Zac de la Plaine, Rue Brindejonc des Moulains
BP 5804, 31505 Toulouse Cedex, France
Phone: 561 36 03 03 Fax: 561 36 03 00
URL : <http://www.icom-france.com>

Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road,
Taipei, Taiwan, R.O.C.
Phone: (02) 2559 1899 Fax: (02) 2559 1874
URL : <http://www.asia-icom.com>

Beijing Icom Ltd.

1305, Wanshang Plaza, Shijingshan Road,
Beijing, China
Phone: (010) 6866 6337 Fax: (010) 6866 3553
URL : <http://www.bjicom.com>



Certificate Number Q14190

Icom Inc. (Japan), is an ISO9001 certification acquired company.

Your local distributor/dealer: